


SYSTEM SETUP

clear 360° view
to sky/horizon

Attach to metal ground plane for best results - i.e. automobile, corrugated roofing, etc

Palm Spk/Mic

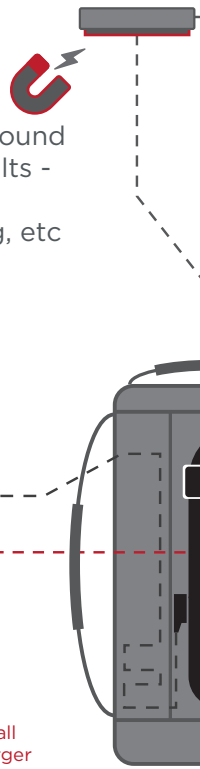

Magnetic mount, dual mode (IRID/GPS) antenna


6V, 1.5A

Use Iridium supplied 6V wall charger or DC vehicle charger -charges both 9575 phone and dock

Rapid Deployment

1. Uncoil and place antenna with view of Iridium satellite constellation/clear sky view
2. With the phone docked, press the Power button on the top of the 9575 phone to power up both phone and dock.
3. Connect Iridium supplied charger to charge both dock and Iridium 9575 phone - fully charged dock battery provides approx. 15 hours of service.

CHARGING
AUDIO



GPS IRID



RJ45
External
Accessories

YOUR PHONE NUMBER:

* phone number assigned by service provider

QUICK START GUIDE



1. Docking cradle can be removed to allow for easier docking of the handset. (see below for procedure)
2. Dual mode, magnetic mount antenna can be easily deployed. Excess cable can be stored in bottom of bag.
3. All components can be deployed directly from the bag.
4. The Iridium supplied charger is used to charge both the dock and the phone.
5. The charging jack is plugged directly into the dock.

How to Dock in Cradle



1. Open the protective cover on the 9575 handset.
2. Open the handset lock on the and slide the 9575 handset into the Dock until fully seated.
3. Press down on the protective cover to expose the handset's contacts. Slide the connector through the guide slot and 'click lock' with the handset.

BE PREPARED. STAY CONNECTED.